

### Overview

- Support H.265/H.264 video formats
- 8-channel input
- Plug & Play with 8 independent PoE network interfaces
- Support HDMI and VGA
- Up to 4K resolution recording
- 1 SATA HDD up to 6TB
- Support cloud upgrade




### Technical Specifications


Video/Audio Input	
IP Video Input	8-ch
Supported camera	advidia M-series
Network	
Incoming Bandwidth	64Mbps
Outgoing Bandwidth	48Mbps
Remote Users	128
Protocols	HTTP, RTSP, SMTP, DNS, DDNS, FTP, P2P, UPnP, NTP, DHCP, PPPoE
Video/Audio Output	
HDMI/VGA Output	HDMI: 3840x2160/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz VGA: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
Recording Resolution	4K/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Recording Mode	Normal, Event, Manual
Audio Output	1-ch, RCA
Camera Control	Pan/Tilt, Zoom, Focus, Iris, Preset Position, Preset Patrol, Recorded Patrol, Auto Guard
Synchronous Playback	8-ch
Multiscreen Mode	Normal Mode: 4/6/8/9 Corridor Mode: 3/4/5/7/9 Web Client: 4/6/8/9
Decoding	
Decoding format	H.265/H.264
Live view/Playback	4K/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Capability	1 x 4K@30fps, 4 x 5MP@25fps, 4 x 4MP@25fps, 4 x 3MP@25fps, 4 x 1080p@30fps, 8 x 720p@30fps

<b>Hard Disk</b>	
SATA	1 SATA interface
Capacity	Up to 6TB
<b>Video Analytics</b>	
VCA Detection	Motion detection, Tampering detection, Intrusion detection, Cross line detection, Human body detection, Audio detection, Face detection
VCA Search	Behavior search (Intrusion, Cross line), Face search
<b>External Interface</b>	
Network Interface	1x 10BASE-T / 100BASE-TX (RJ45)
USB Interface	Rear panel: 2 x USB2.0
<b>PoE</b>	
Interface	8x 10BASE-T / 100BASE-TX (RJ45)
Max Power	Max 30W for single port Max 75W in total
Supported Standard	IEEE 802.3at, IEEE 802.3af
<b>General</b>	
Safety:	CE, IEC62368-1
EMC:	EN55032 ClassB, EN55024
Power Supply	52V DC Power Consumption: ≤9 W (without HDD)
Working Environment	-10°C~+ 55°C (+14°F~+131°F), Humidity ≤ 90% RH (non-condensing)
Dimensions (W×D×H)	260mm ×240mm × 46 mm (10.2" × 9.4" ×1.8")
Weight (without HDD)	≤1.1kg (2.43lb)

## Dimensions

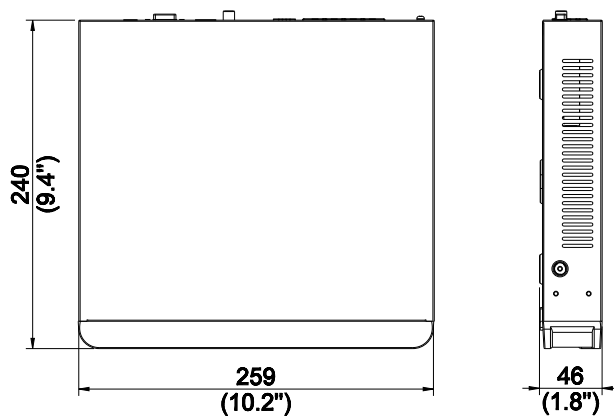

## Rear Panel



R113021 | Product specifications and availability are subject to change without notice.

Panasonic i-PRO Sensing Solutions Co., Ltd. i-PRO, Viewnetcam.com, FacePRO, Advidia, VideoInsight, Arbitrator, CloUDE, and Unified Digital Evidence are registered trademarks or trademarks of Panasonic i-PRO Sensing Solutions Co., Ltd. or Panasonic i-PRO Sensing Solutions Corporation of America in various jurisdictions. All other trademarks are the property of their respective owners.